

# Eagle HC 72P 325-345 Watt

POLY CRYSTALLINE MODULE

Positive power tolerance of 0~ +3%

- Half Cell
- Poly 72 Cell



## KEY FEATURES



### 5 Busbar Solar Cell:

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



### High Efficiency:

Higher module conversion efficiency (up to 17.50%) benefit from Half cells structure (low resistance characteristic)



### PID RESISTANT:

Limited power degradation of Eagle module caused by PID effect is guaranteed under strict testing condition (85 C /85%RH,96hours) for mass production.



### Low-light Performance:

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



### Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



### Durability against extreme environmental conditions:


High salt mist and ammonia resistance certified by TUV NORD.




## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

- ISO9001:2008、ISO14001:2004、OHSAS18001 certified factory.
- IEC61215、IEC61730 certified products

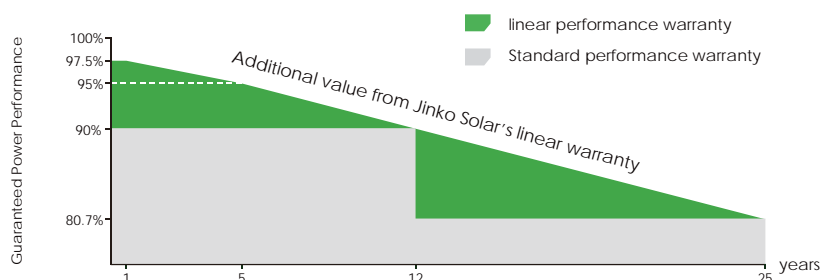

## Engineering Drawings

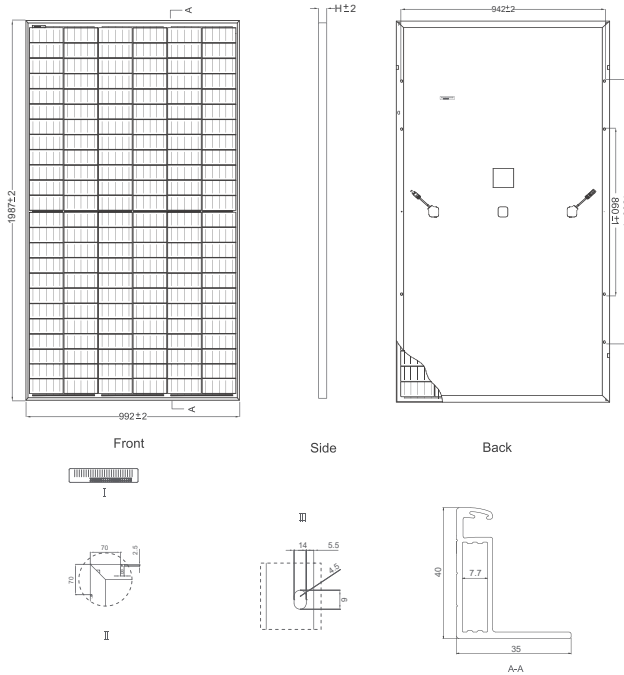


## Packaging Configuration

(Two pallets = One stack)

26pcs/pallet, 52pcs/stack, 572 pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

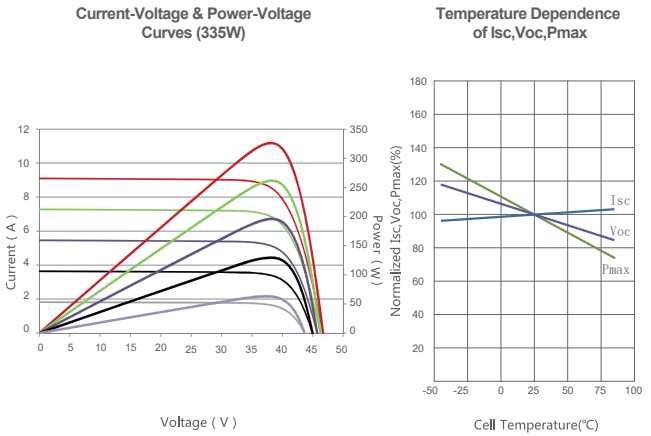

## Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of Half-cells	144 (12×12)
Dimensions	1987×992×40mm (78.23×39.05×1.57 inch)
Weight	26.5 kg (58.4 lbs)
Front Glass	4.0mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	anode 290mm, cathode 145mm

## SPECIFICATIONS

Module Type	JKM325PP-72H		JKM330PP-72H		JKM335PP-72H		JKM340PP-72H		JKM345PP-72H	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	325Wp	243Wp	330Wp	247Wp	335Wp	251Wp	340Wp	255Wp	345Wp	259Wp
Maximum Power Voltage (Vmp)	37.6V	36.4V	37.8V	36.8V	38.0V	37.2V	38.2V	37.6V	38.5V	38.1V
Maximum Power Current (Imp)	8.64A	6.67A	8.72A	6.70A	8.80A	6.74A	8.88A	6.77A	8.96A	6.81A
Open-circuit Voltage (Voc)	46.9V	44.0V	47.1V	44.2V	47.3V	44.5V	47.5V	44.8V	47.8V	45.0V
Short-circuit Current (Isc)	8.97A	7.26A	9.05A	7.31A	9.13A	7.36A	9.21A	7.41A	9.28A	7.46A
Module Efficiency STC (%)	16.49%		16.74%		17.00%		17.25%		17.50%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000VDC (IEC)									
Maximum series fuse rating	20A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.38%/°C									
Temperature coefficients of Voc	-0.31%/°C									
Temperature coefficients of Isc	0.06%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

\* Power measurement tolerance: ± 3%