

Eagle Black 60P 260-280 Watt POLYCRYSTALLINE MODULE

Positive power tolerance of 0~+3%

ISO9001:2008, ISO14001:2004, OHSAS18001
certified factory.
IEC61215, IEC61730 certified products.



(5BB)



KEY FEATURES



PID RESISTANT:

Limited power degradation of Eagle module caused by PID effect is guaranteed under strict testing condition (85 C /85%RH,96hours)for mass production.



High Power Output:

With up to 280 Wp and 17.11 % efficiency, highest performing module of its kind on the market.



Low-light Performance:

Excellent performance in low-light environments.



Severe Weather Resilience:

Extremely weather resistant due to approval for increased snow and wind loads: 5400 Pa snow load, 2400 Pa wind load.




5 Busbar Solar Cell:


No power loss thanks to improved temperature co-efficient caused by 5 busbar solar cell.

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

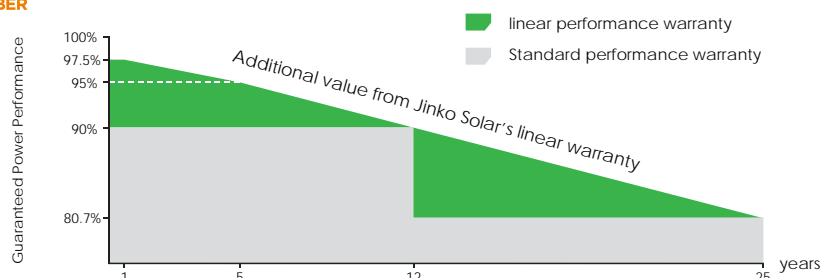

Engineering Drawings

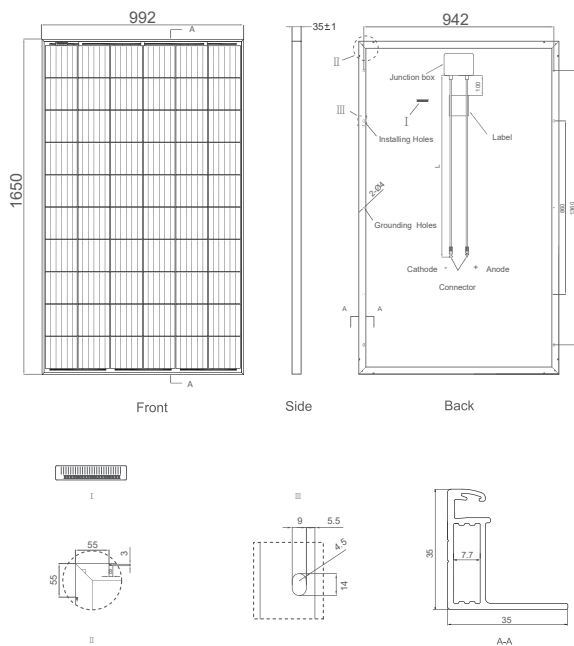


Packaging Configuration

(Two pallets = One stack)


30pcs/pallet, 60pcs/stack, 840 pcs/40'HQ Container

Electrical Performance & Temperature Dependence

Current-Voltage & Power-Voltage Curves (275W)

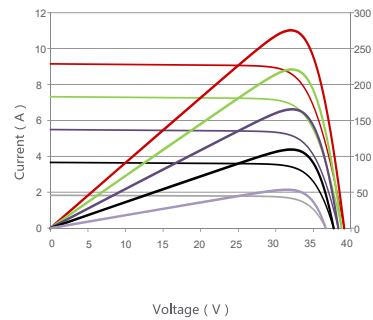

Temperature Dependence of I_{sc} , V_{oc} , P_{max}

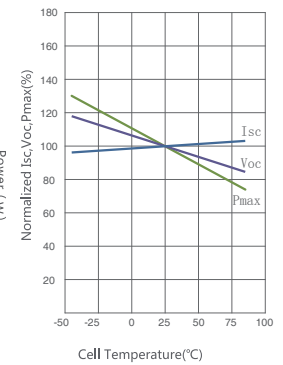

Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of cells	60 (6×10)
Dimensions	1650×992×35mm (65.00×39.05×1.37 inch)
Weight	19.0 kg (41.9 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1×4.0mm ² , Length: 900mm or Customized Length

SPECIFICATIONS

Module Type	JKM260PP-60-J4		JKM265PP-60-J4		JKM270PP-60-J4		JKM275PP-60-J4		JKM280PP-60-J4	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	260Wp	193Wp	265Wp	197Wp	270Wp	200Wp	275Wp	204Wp	280Wp	208Wp
Maximum Power Voltage (Vmp)	31.1V	28.7V	31.4V	29.0V	31.7V	29.4V	32.0V	29.8V	32.3V	30.1V
Maximum Power Current (Imp)	8.37A	6.71A	8.44A	6.78A	8.52A	6.80A	8.61A	6.85A	8.69A	6.91A
Open-circuit Voltage (Voc)	38.1V	35.2V	38.6V	35.3V	38.8V	35.4V	39.1V	35.4V	39.4V	35.6V
Short-circuit Current (Isc)	8.98A	7.31A	9.03A	7.36A	9.09A	7.38A	9.15A	7.44A	9.20A	7.99A
Module Efficiency STC (%)	15.88%		16.19%		16.50%		16.80%		17.11%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000VDC (IEC)									
Maximum series fuse rating	20A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.40%/°C									
Temperature coefficients of Voc	-0.31%/°C									
Temperature coefficients of Isc	0.06%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

*STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%