

Swan Bifacial 72H 385-405 Watt

MONOCRYSTALLINE MODULE

Positive power tolerance of 0~+3%

ISO9001:2015, ISO14001:2015, ISO45001:2018
certified factory.

IEC61215(2016), IEC61730(2016)
certified products.



PERC



KEY FEATURES



5 Busbar Solar Cell

5 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Higher Lifetime Power Yield

0.5% annual power degradation
30 year linear power warranty



Saving BOS Cost

Designed for high voltage systems of up to 1500 VDC, saving BOS cost



Higher power output

Module power increases 5-25% generally (per different reflective condition)
lower LCOE and higher IRR



Better low-light performance

Excellent performance in low-light environments
(e.g. early morning, dusk, and cloud, etc.)




Strengthened Mechanical Support

5400 Pa snow load, 2400 Pa wind load




LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty • 30 Year Linear Power Warranty
0.5% Annual Degradation Over 30 years

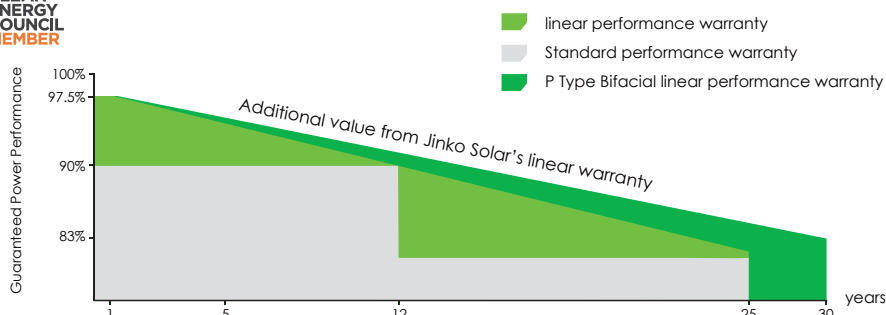

Engineering Drawings

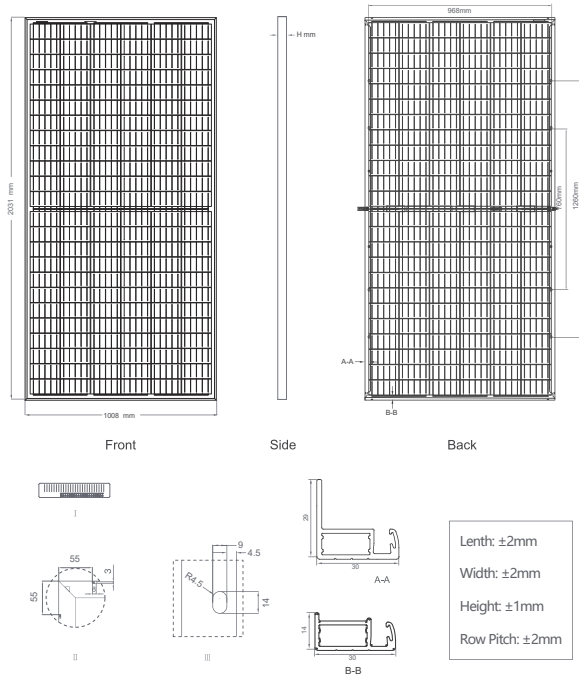


Packaging Configuration

(Two pallets = One stack)

35pcs/pallets, 70pcs/stack, 770pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

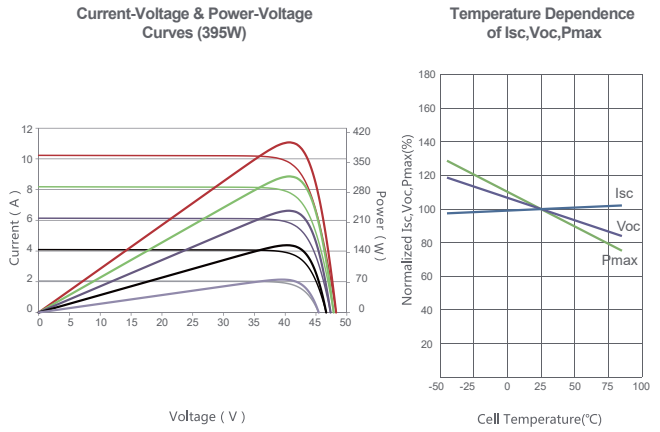

Mechanical Characteristics

Cell Type	Mono PERC 158.75×158.75mm
No.of cells	144 (6×24)
Dimensions	2031×1008×30mm (79.96×39.69×1.18 inch)
Weight	26.6kg (58.64 lbs)
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm heat strengthened glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TUV 1×4.0mm ² (+): 250mm, (-): 150mm or cust omized length

SPECIFICATIONS

Module Type	JKM385M-72H-BDVP		JKM390M-72H-BDVP		JKM395M-72H-BDVP		JKM400M-72H-BDVP		JKM405M-72H-BDVP	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	385Wp	286Wp	390Wp	290Wp	395Wp	294Wp	400Wp	298Wp	405Wp	301Wp
Maximum Power Voltage (Vmp)	39.50V	36.63V	39.62V	36.78V	39.83V	36.87V	40.01V	37.01V	40.19V	37.15V
Maximum Power Current (Imp)	9.76A	7.82A	9.84A	7.89A	9.92A	7.97A	10.00A	8.04A	10.08A	8.11A
Open-circuit Voltage (Voc)	48.10V	45.30V	48.14V	45.34V	48.26V	45.45V	48.35V	45.54V	48.45V	45.63V
Short-circuit Current (Isc)	10.32A	8.34A	10.41A	8.41A	10.50A	8.48A	10.59A	8.55A	10.68A	8.63A
Module Efficiency STC (%)	18.81%		19.05%		19.29%		19.54%		19.78%	
Operating Temperature(°C)	-40°C~-+85°C									
Maximum system voltage	1500VDC (IEC)									
Maximum series fuse rating	25A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.35%/°C									
Temperature coefficients of Voc	-0.29%/°C									
Temperature coefficients of Isc	0.048%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									
Refer. Bifacial Factor	70±5%									

BIFACIAL OUTPUT-REARSIDE POWER GAIN

5%	Maximum Power (Pmax)	404Wp	410Wp	415Wp	420Wp	425Wp
	Module Efficiency STC (%)	19.75%	20.00%	20.26%	20.52%	20.77%
15%	Maximum Power (Pmax)	443Wp	449Wp	454Wp	460Wp	466Wp
	Module Efficiency STC (%)	21.63%	21.91%	22.19%	22.47%	22.75%
25%	Maximum Power (Pmax)	481Wp	488Wp	494Wp	500Wp	506Wp
	Module Efficiency STC (%)	23.51%	23.81%	24.12%	24.42%	24.73%

* STC: Irradiance 1000W/m² Cell Temperature 25°C

NOCT: Irradiance 800W/m² Ambient Temperature 20°C

AM=1.5

AM=1.5

Wind Speed 1m/s

* Power measurement tolerance: ± 3%

The company reserves the final right for explanation on any of the information presented hereby.
SWAN DG JKM385-405M-72H-BDVP-F30-G2.0-A2(2)-EN